


NOTES

- 1) INSULATION RESISTANCE 500 MEGOhm's AT 500v DC MIN
 2) HERMETICITY 1×10^{-8} ATM CC/SEC MAX

FINISH

7μM MIN CULMO Sn OVER 2.5μM Cu

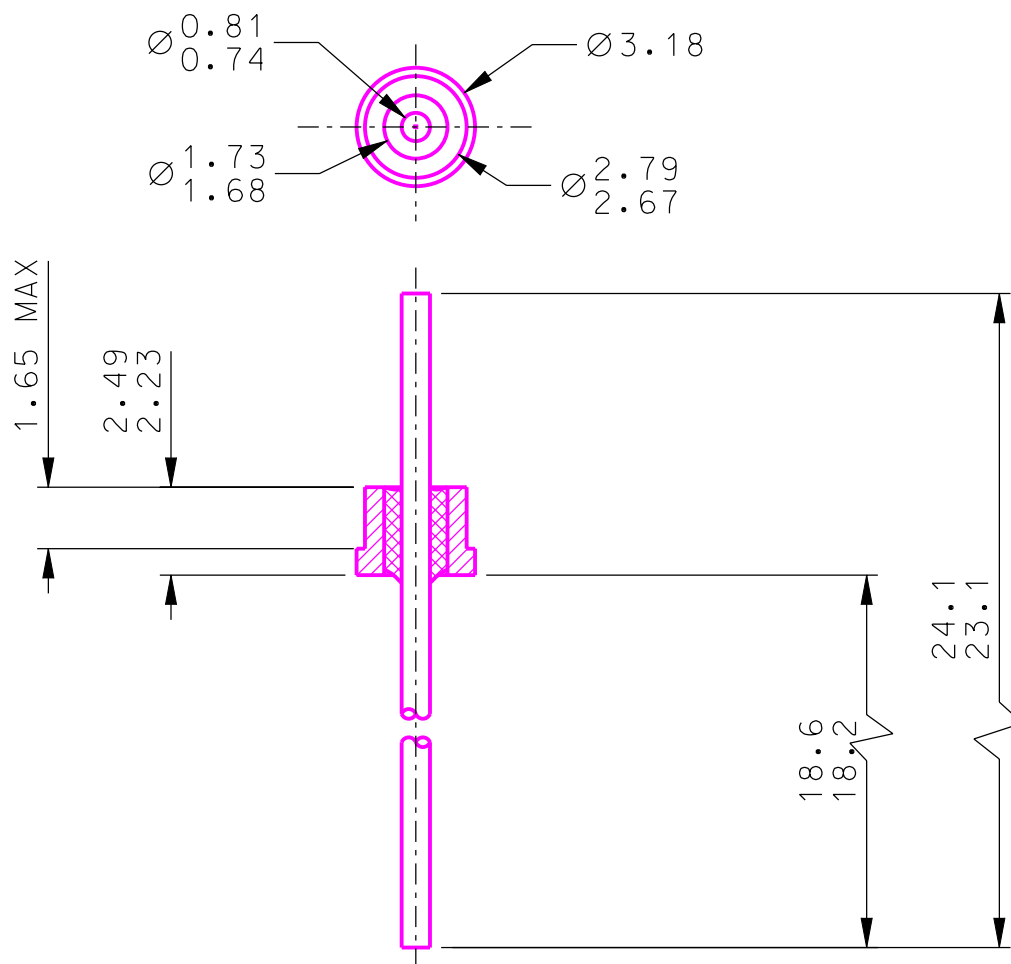

THIS DRAWING IS THE COPYRIGHT AND PROPERTY OF SGA TECHNOLOGIES LTD.

IT MUST NOT BE COPIED IN WHOLE OR IN PART, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.

ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST INCLUDE A COPY OF THIS LEGEND AND THE SGA LOGO.

© S.G.A 2004

APA: 85MM²

REVISION 2: TRANSFERRED TO CAD
NO PHYSICAL CHANGE

4	SE1894	GLASS PREFORM	COMPRESSION TYPE	1
3	SP1894	PIN	ALLOY 48 NiFe	1
2	SF1894	FERRULE	MILD STEEL	1
1		GTMS		A
PART #	DRG N°	DESCRIPTION	MATERIAL	QTY

ISSUE	DCN	DATE	TOLERANCES UNLESS OTHERWISE STATED
2	7894	1/8 /06	
			±0.1
			© 2006 S.G.A. TEL. 01799 527264

DRAWN	DATE
C. I. BROWN	31/7/06
APPROVED	DATE
ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED	
DO NOT SCALE	



THIRD ANGLE PROJECTION DRG. No. W1894